



## GL1353

### GL1353-B

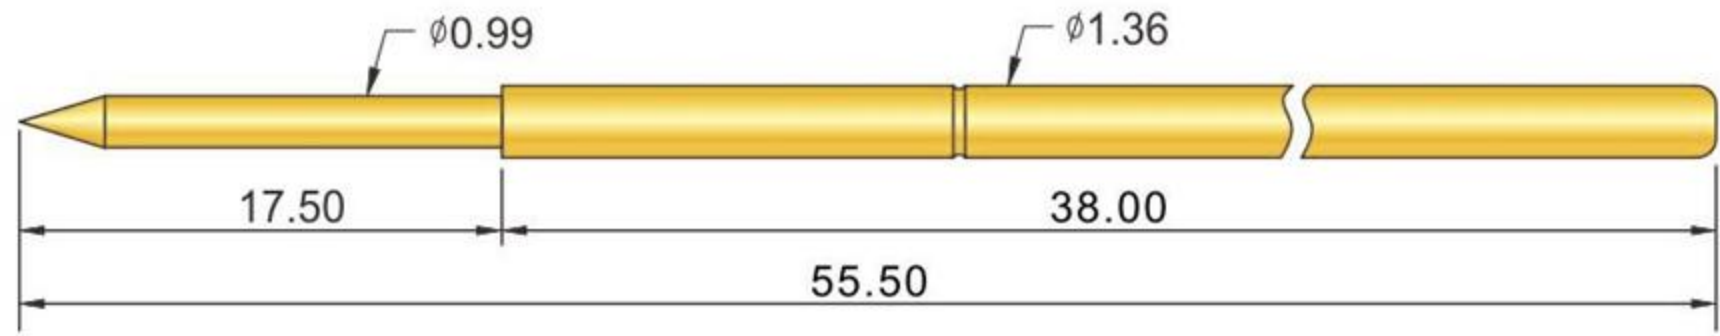


### GL1353-Q

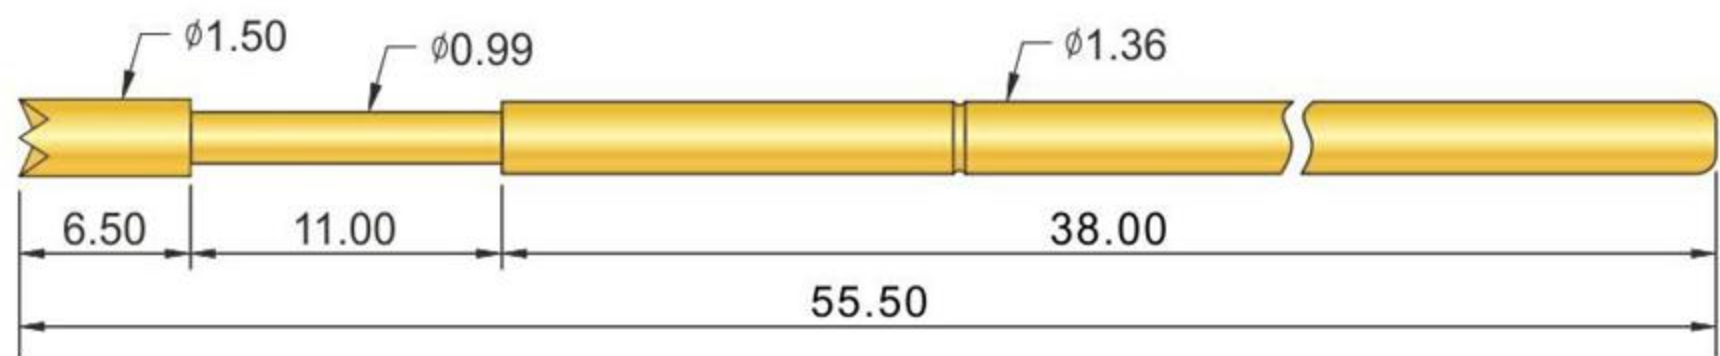

	GL1353-B	<b>技术要求 ( Technical Specifications ) :</b>	
		额定电流 ( Current Rating )	3A
		接触电阻 ( Contact Resistance )	50 milliohm
		行程弹力 ( Spring Force at Stroke )	250g
	GL1353-H	<b>材质 ( Materials ) :</b>	
		针杆 ( Plunger )	BeCu or SK4, Rh or gold-plated
		针管 ( Barrel )	Ph, gold-plated
		弹簧 ( Spring )	Music Wire
	GL1353-Q	<b>成品型号 ( Product Type ) :</b>	
		<b>GL1353-Q-250g</b> 系列    规格    头型    弹力	
	GL1353-M3	订购举例: GL1353-Q-250g	

## GL1353R-W

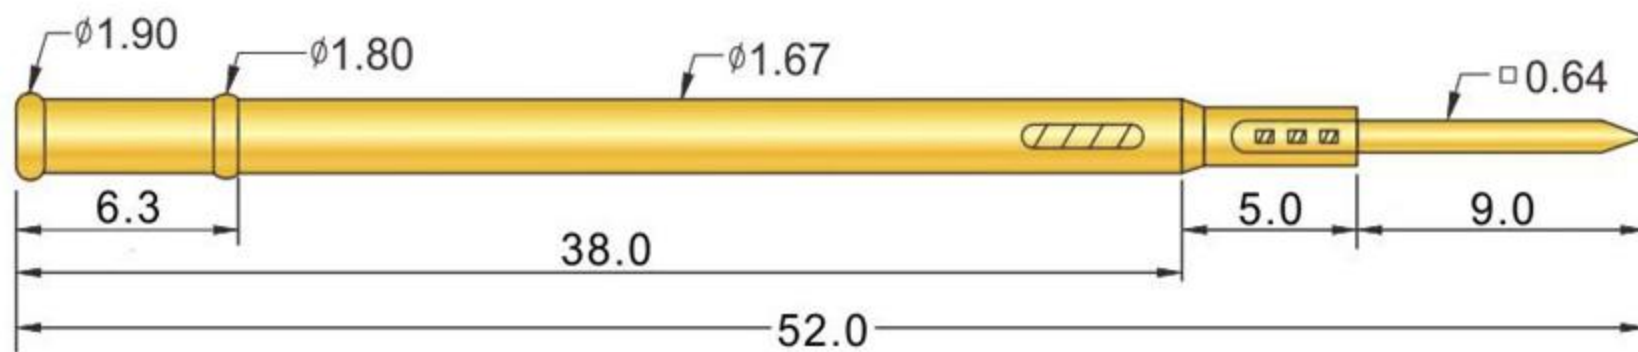

钻孔尺寸: 1.70mm

<b>成品型号 ( Product Type ) :</b>	<b>材质 ( Materials ) :</b>	
GL1353R-W 系列    规格    尾部特征 订购举例: GL1353R-W	针套(Receptacle)	Brass, gold-plated