


## P030

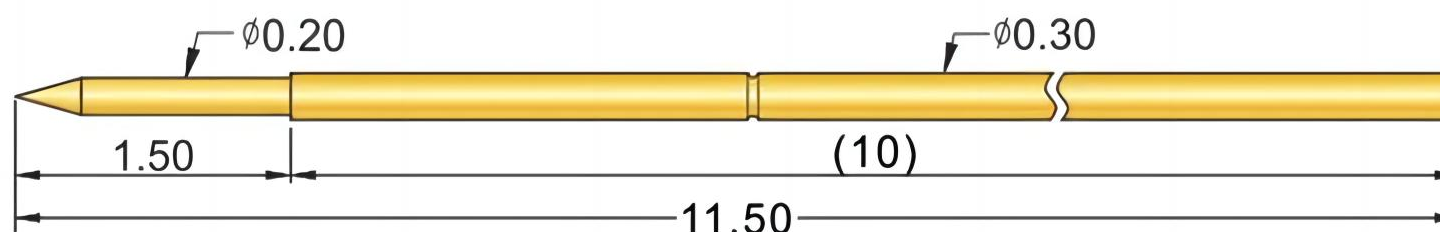


P030-J	P030-B
P030-Q	P030-F

技术要求 ( Technical Specifications ) :	
额定电流 ( Current Rating )	1A
额定电阻 ( Rated Resistance )	100 milliohm max
满行程 ( Full Stroke )	1.50mm
满行程弹力 ( Spring Force at Full Stroke )	20g

成品型号 ( Product Type ) :	
<b>P030-X-20g</b>	订购举例:P030-B-20g
系列	规格 头型 弹力

材质 (Materials) :	
针杆 (Plunger)	BeCu or SK4,gold-plated
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	SWP or SUS,gold-plated

## R030

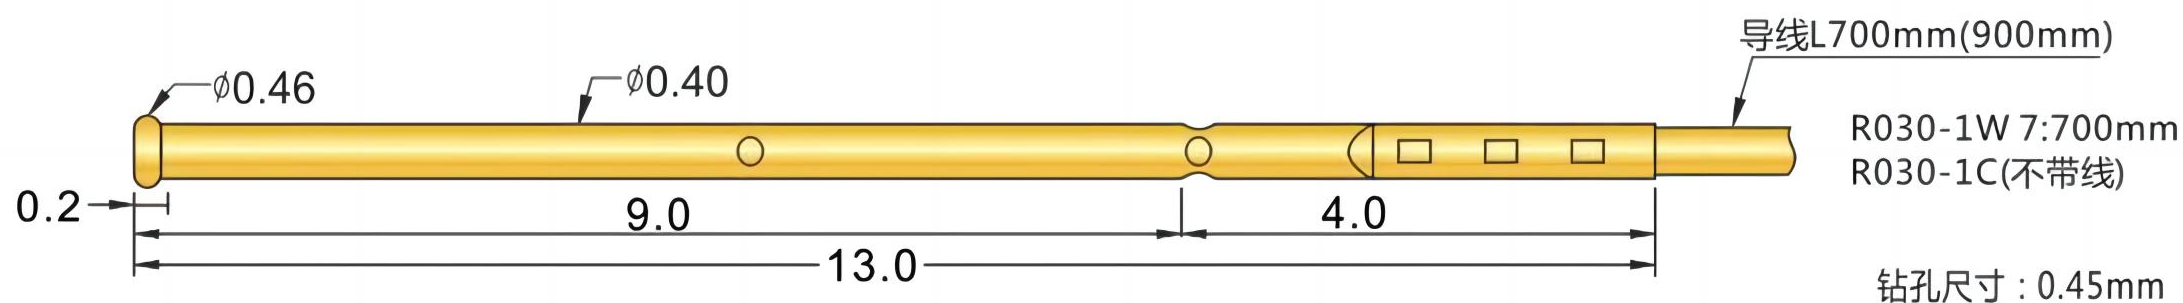

成品型号 ( Product Type ) :	
<b>R030-1W</b>	订购举例:R030-1W
系列	规格 尾部特征

材质 (Materials) :	
针套(Receptacle)	Ph,gold-plated

PROBE