



P048-X


P048

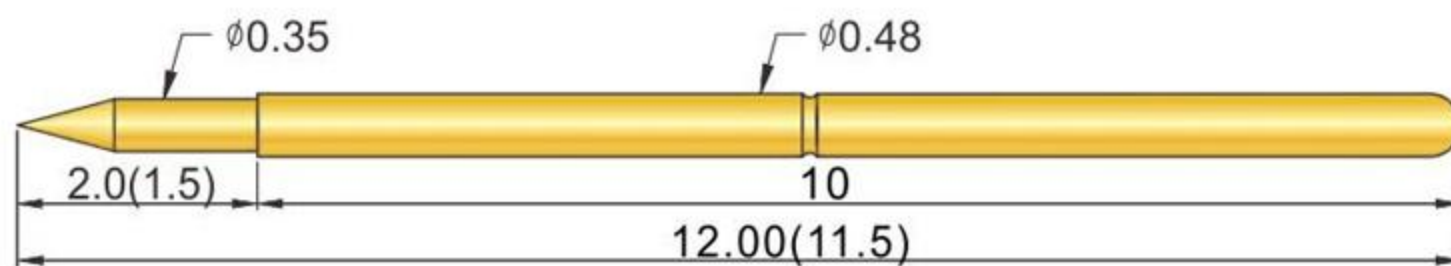

P048-XL

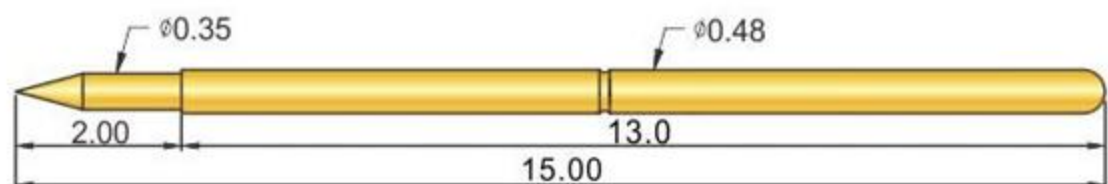

P048-XLL

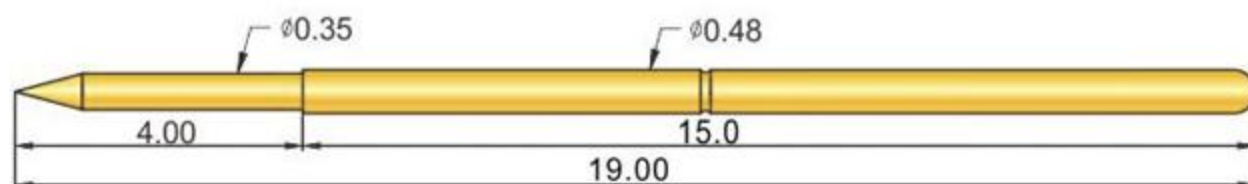


P048-A	P048-B
P048-E	P048-F1
P048-G	P048-J1
P048-Q1	P048-T


技术要求 (Technical Specifications) :	
额定电流 (Current Rating)	2A
接触电阻 (Contact Resistance)	50 milliohm
行程弹力 (Spring Force at Stroke)	(20g)40g <small>(括号内为定制品)</small>
材质 (Materials) :	
针杆 (Plunger)	SK4,Rh-plated
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	Stainless Steel Wire
成品型号 (Product Type) :	
<p>P048-B-40g</p> <p>系列 规格 头型 弹力</p> <p>订购举例:P048-B-40g</p>	

R048


R048-C

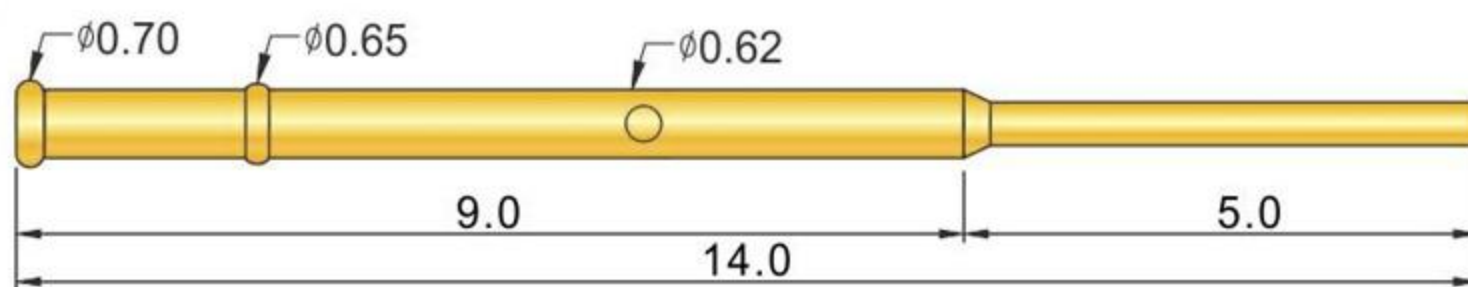


R048-W7

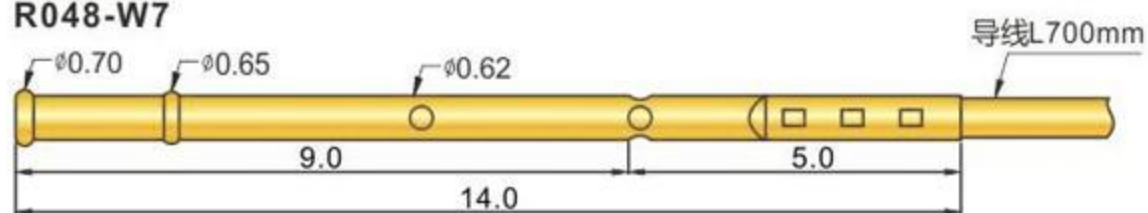


R048-C L

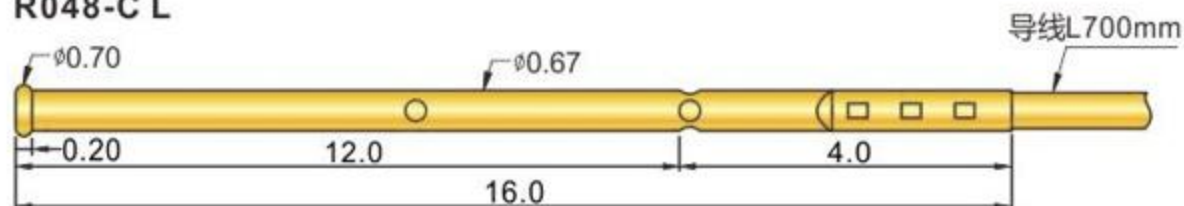


R048-W7 L

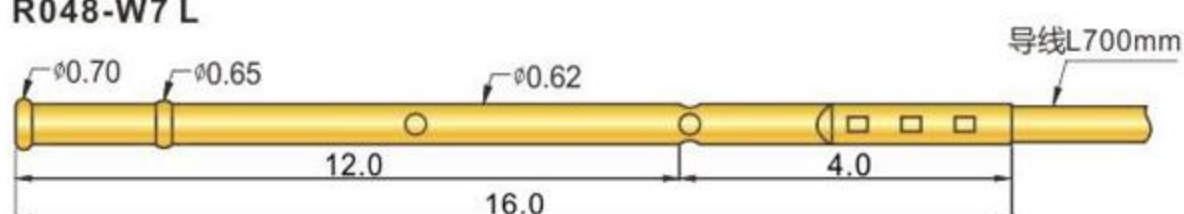

R048-C LL

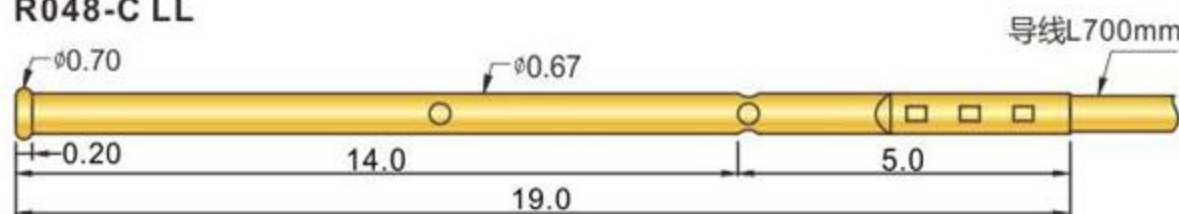

R048-W7 LL

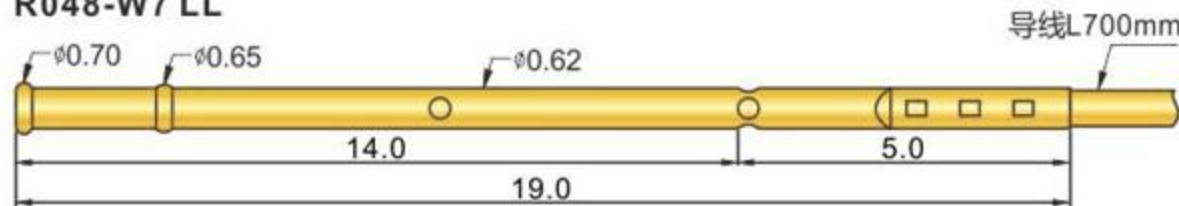

钻孔尺寸 : 0.70mm

成品型号 (Product Type) :	材质 (Materials) :	
<p>R048-C</p> <p>系列 规格 尾部特征</p> <p>订购举例:R048-C</p>	针套(Receptacle)	Brass,gold-plated