


PROBE

P058

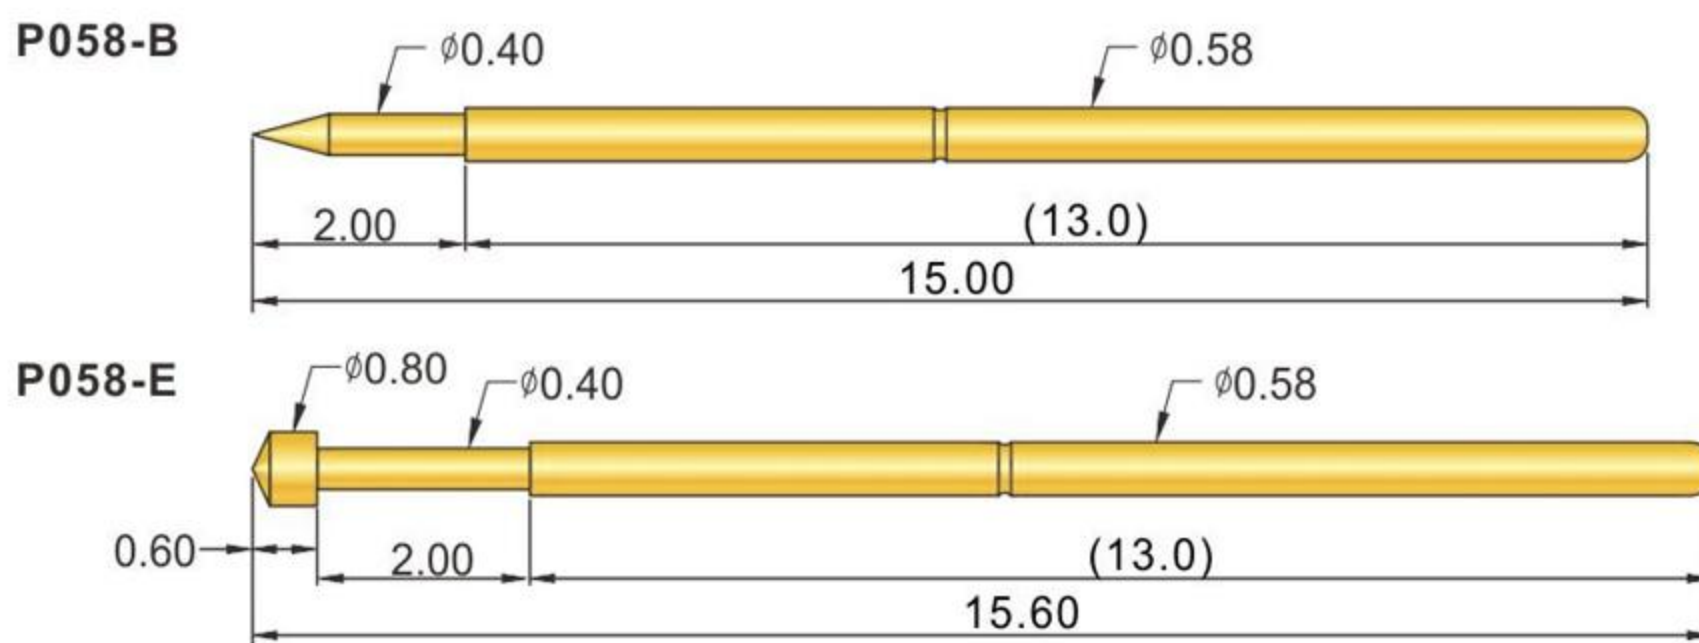


技术要求 (Technical Specifications) :	
额定电流 (Current Rating)	2A
接触电阻 (Contact Resistance)	50 milliohm
行程弹力 (Spring Force at Stroke)	(20g)70g <small>(括号内为定制品)</small>
材质 (Materials) :	
针杆 (Plunger)	SK4,Rh-plated
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	Stainless Steel Wire
成品型号 (Product Type) :	
<p style="text-align: center;"> P058-B-70g 订购举例:P058-B-70g </p> <p style="font-size: small; text-align: center;"> 系列 规格 头型 弹力 </p>	


P058-A	P058-A1	P058-B1
P058-D	P058-E	P058-F1
P058-G	P058-G1	P058-H
P058-J1	P058-Q1	P058-Q2
P058-T		

R058

R058-C

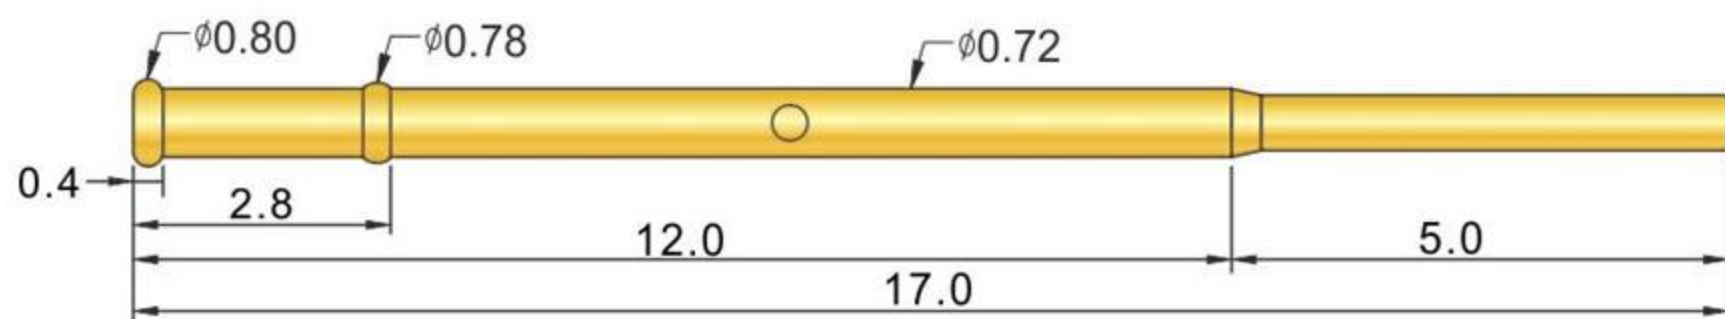

R058-W7

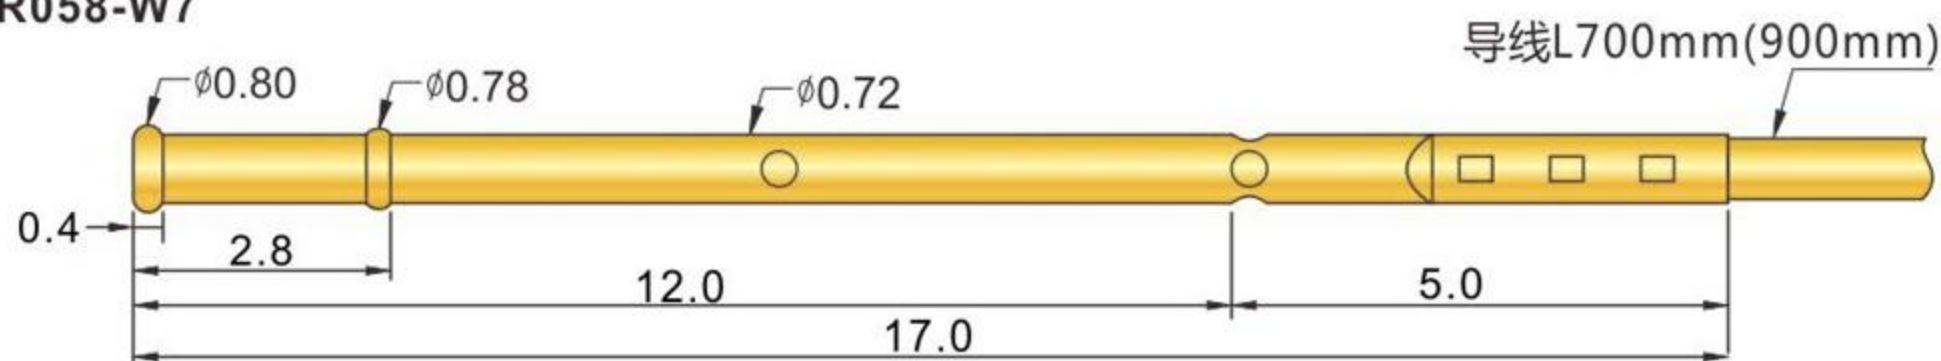

钻孔尺寸 : 0.80mm

材质 (Materials) :		成品型号 (Product Type) :	
针套(Receptacle)	Brass,gold-plated	<p style="text-align: center;"> R058-C 订购举例:R058-C </p> <p style="font-size: small; text-align: center;"> 系列 规格 尾部特征 </p>	