



PL50

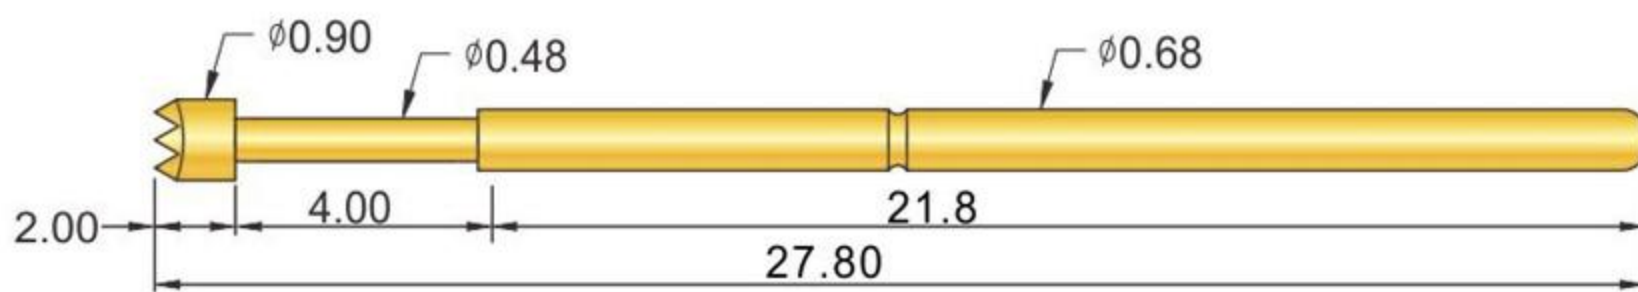

PL50-A2	PL50-B1	PL50-D2	技术要求 (Technical Specifications) :	
			额定电流 (Current Rating)	3A
PL50-E2	PL50-F1	PL50-G2	接触电阻 (Contact Resistance)	50 milliohm
			行程弹力 (Spring Force at Stroke)	100g
PL50-H2	PL50-J1	PL50-LM2	材质 (Materials) :	
			针杆 (Plunger)	BeCu or SK4,Rh or gold-plated
PL50-Q1	PL50-Q2	PL50-T2	针管 (Barrel)	Ph,gold-plated
			弹簧 (Spring)	Stainless Steel Wire
成品型号 (Product Type) :			<p>PL50-H2-100g</p> <p>系列 规格 头型 头部直径 弹力</p> <p>*1*表示针杆直上头型直径为0.48mm *2*表示标准头型直径为0.90mm *3*表示外径为1.20mm</p> <p>订购举例:PL50-H2-100g</p>	

RL50

RL50-2S

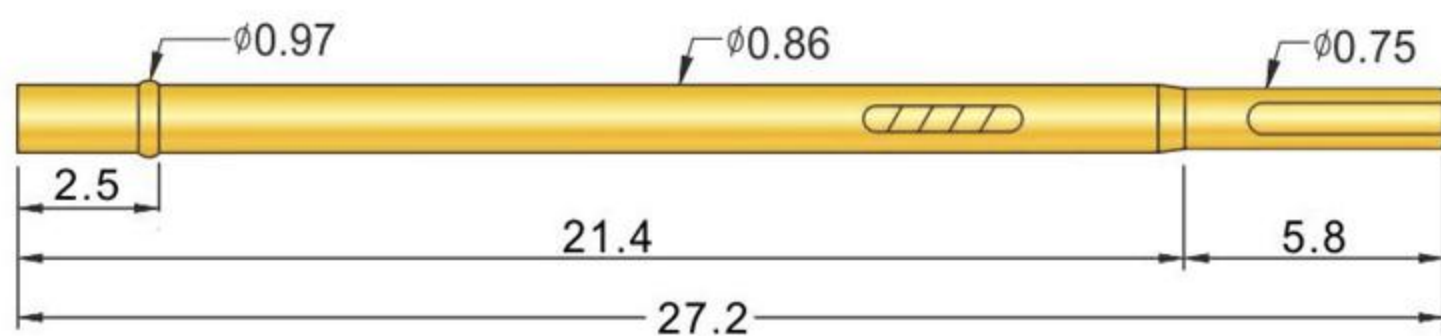

RL50-2C



RL50-2W7



钻孔尺寸 : 0.90mm

成品型号 (Product Type) :	材质 (Materials) :	
<p>RL50-2S</p> <p>系列 规格 尾部特征</p> <p>订购举例:RL50-2S</p>	针套(Receptacle)	Ph,gold-plated