


## P035

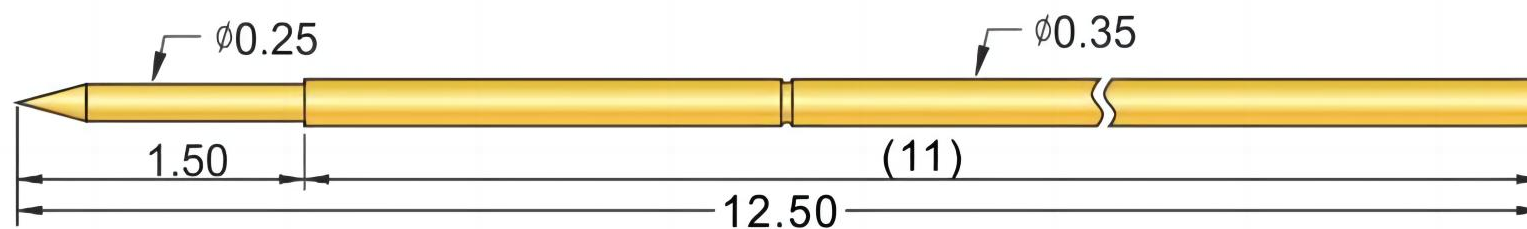


P035-J	P035-B
P035-Q	P035-F

技术要求 ( Technical Specifications ) :	
额定电流 ( Current Rating )	1A
额定电阻 ( Rated Resistance )	100 milliohm max
满行程 ( Full Stroke )	1.50mm
满行程弹力 ( Spring Force at Full Stroke )	40g

成品型号 ( Product Type ) :	
<b>P035-X-40g</b>	订购举例:P035-B-40g
系列 规格 头型 弹力	

材质 (Materials) :	
针杆 (Plunger)	BeCu or SK4,gold-plated
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	SWP or SUS,gold-plated

## R035

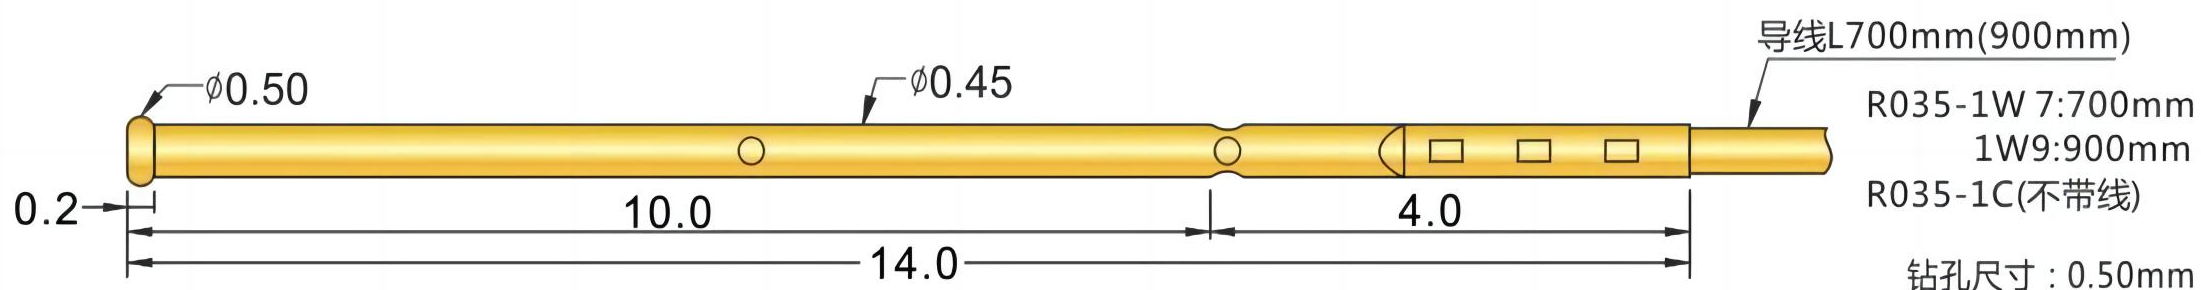

成品型号 ( Product Type ) :	
<b>R035-1W</b>	订购举例:R035-1W
系列 规格 尾部特征	

材质 (Materials) :	
针套(Receptacle)	Ph,gold-plated