


P100

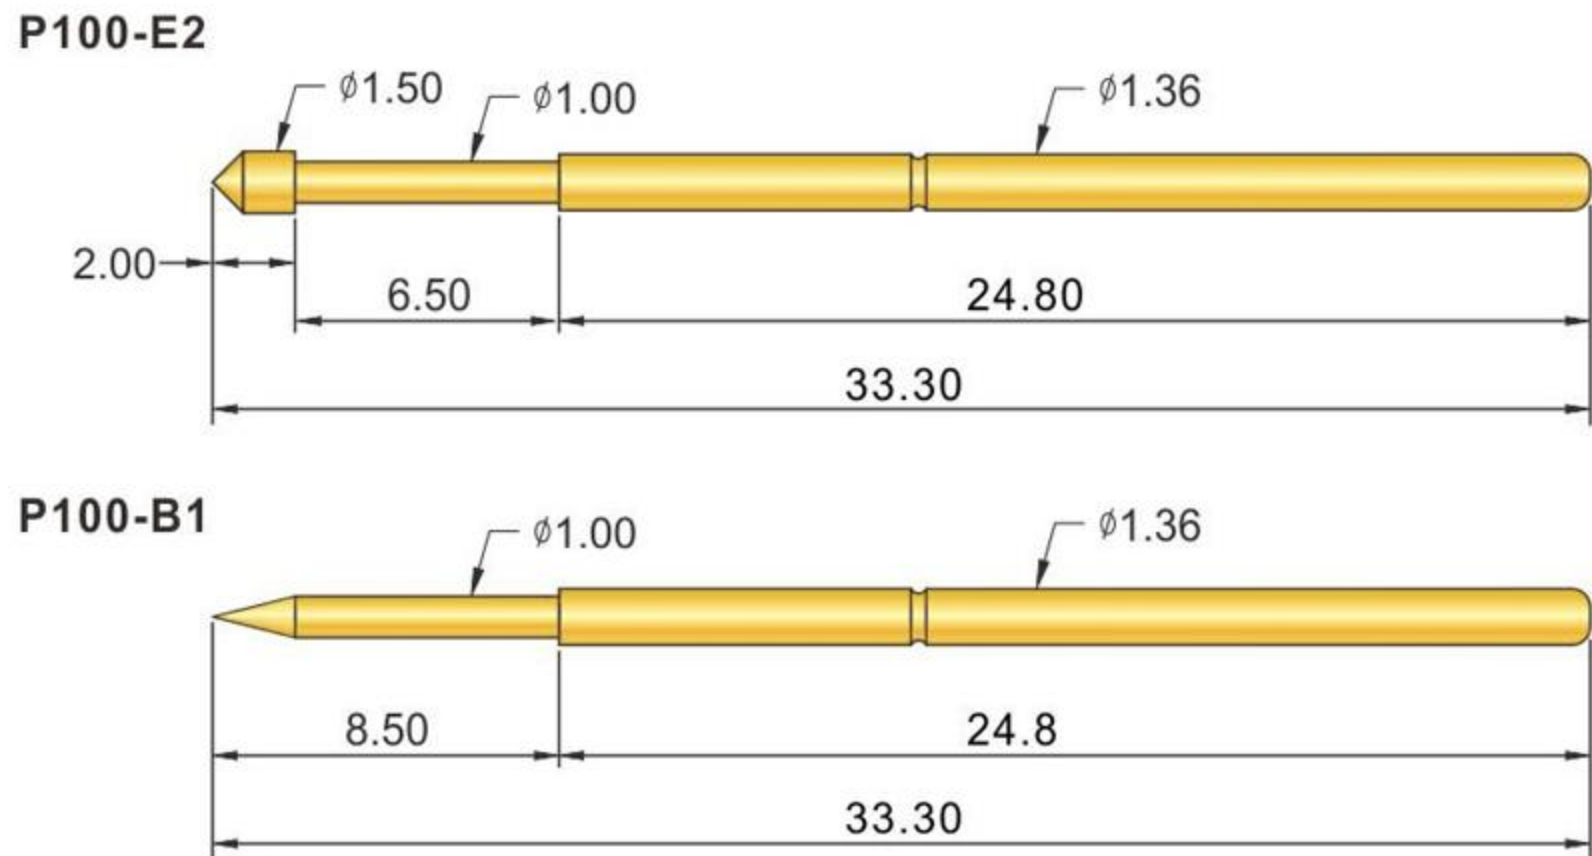

P100-A2	P100-A3	P100-B1	P100-D2	P100-D3
P100-E2	P100-E3	P100-F1	P100-G1	P100-G2
P100-H2	P100-H3	P100-H4	P100-H5	P100-H6
P100-J1	P100-LM2	P100-LM3	P100-Q1	P100-Q2
P100-M3	P100-T2	P100-T3		

技术要求 (Technical Specifications) :

额定电流 (Current Rating)	3A
接触电阻 (Contact Resistance)	50 milliohm
行程弹力 (Spring Force at Stroke)	(40g)(90g)(120g)180g(250g)(280g)(350g)

(括号内为定制品)

材质 (Materials) :

针管 (Barrel)	Ph, gold-plated	
弹簧 (Spring)	Stainless Steel Wire	
针杆 (Plunger)	国产料 (Domestic Materials)	Ph, Nickel-plated
	进口料 (Imported materials)	BeCu or SK4, Rh or gold-plated

成品型号 (Product Type) :


P100-E2-180g
系列 规格 头型 头部直径 弹力

*1"表示针杆直上头型直径为1.00mm
*2"表示标准头型直径为1.50mm
*3"表示外径为1.80mm

订购举例: P100-E2-180g

R100-1W

R100

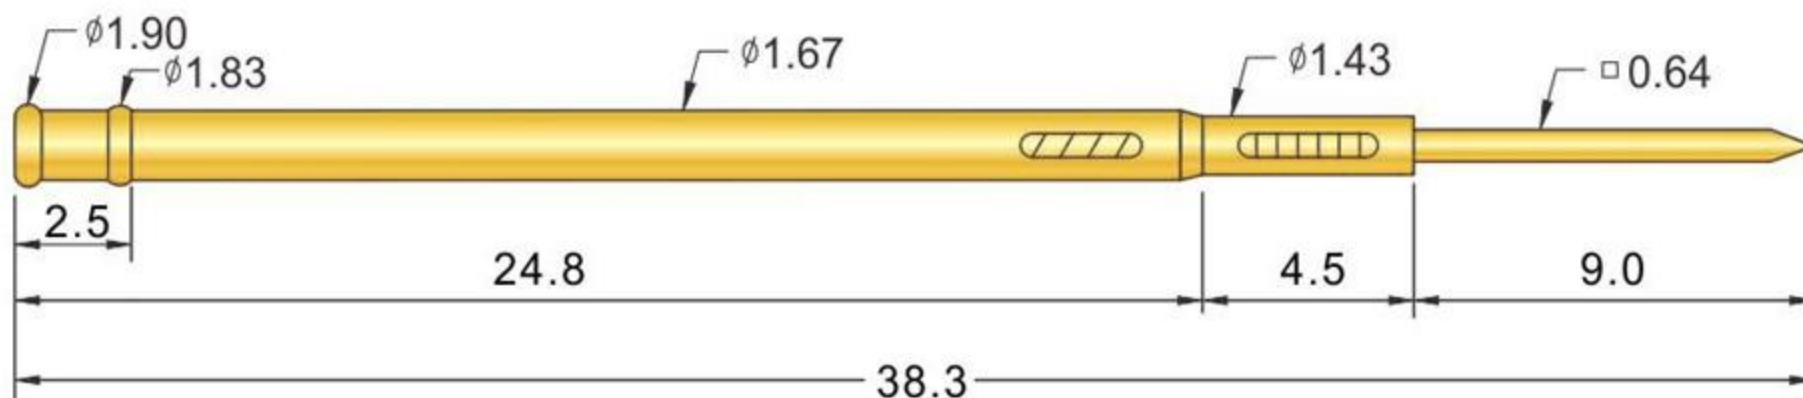

R100-1W



R100-1T



R100-2W



R100-2T



R100-3W



R100-3T



R100-4W



R100-4T



R100-5W



R100-5T



R100-1S



R100-3VW



R100-2S



R100-4VW



R100-3S



R100-3VT



R100-4S



R100-4VT



钻孔尺寸: 1.70mm

成品型号 (Product Type) :		材质 (Materials) :	
R100-1W	订购举例: R100-1W	针套(Receptacle)	Brass, gold-plated
系列	规格	尾部特征	