


P11

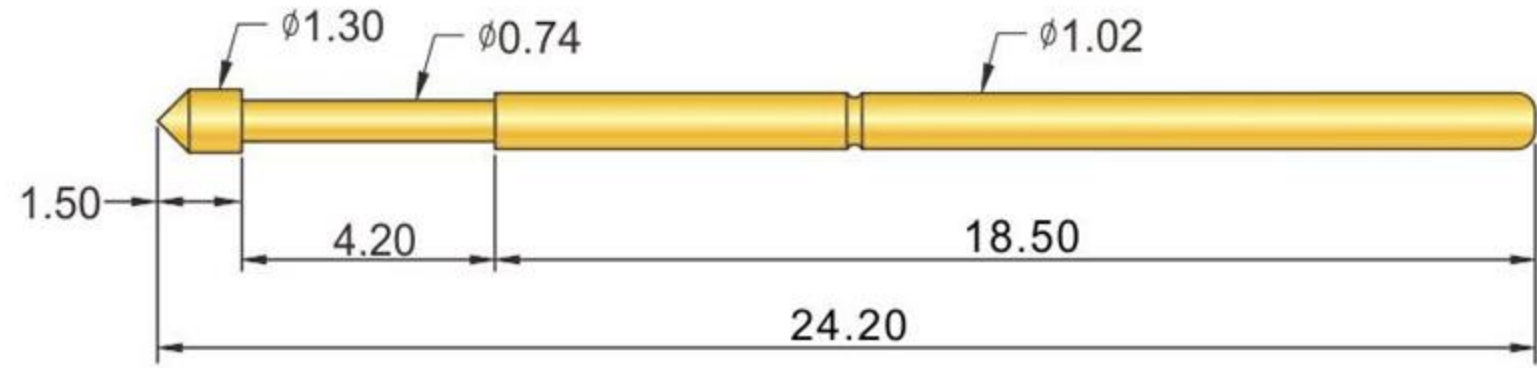

P11-A2	P11-B1	P11-D2	P11-D3	P11-E2
P11-J1	P11-F	P11-Q1	P11-Q2	P11-G1
P11-G2	P11-H2	P11-H3	P11-T2	P11-T3
P11-LM2	P11-LM3			

技术要求 (Technical Specifications) :

额定电流 (Current Rating)	3A
接触电阻 (Contact Resistance)	50 milliohm
行程弹力 (Spring Force at Stroke)	(80g)150g

(括号内为定制品)

材质 (Materials) :


针管 (Barrel)	Ph,gold-plated	
弹簧 (Spring)	Stainless Steel Wire	
针杆 (Plunger)	国产料 (Domestic Materials)	Ph,Nickel-plated
	进口料 (Imported materials)	BeCu or SK4,Nickel or Rh or gold-plated

成品型号 (Product Type) :

<p>P11-E2-150g</p>	<p>*1*表示针杆直上头型直径为0.74mm *2*表示标准头型直径为1.30mm *3*表示外径为1.50mm</p>	<p>订购举例:P11-E2-150g</p>
---------------------------	---	-------------------------

R11

R11-1W

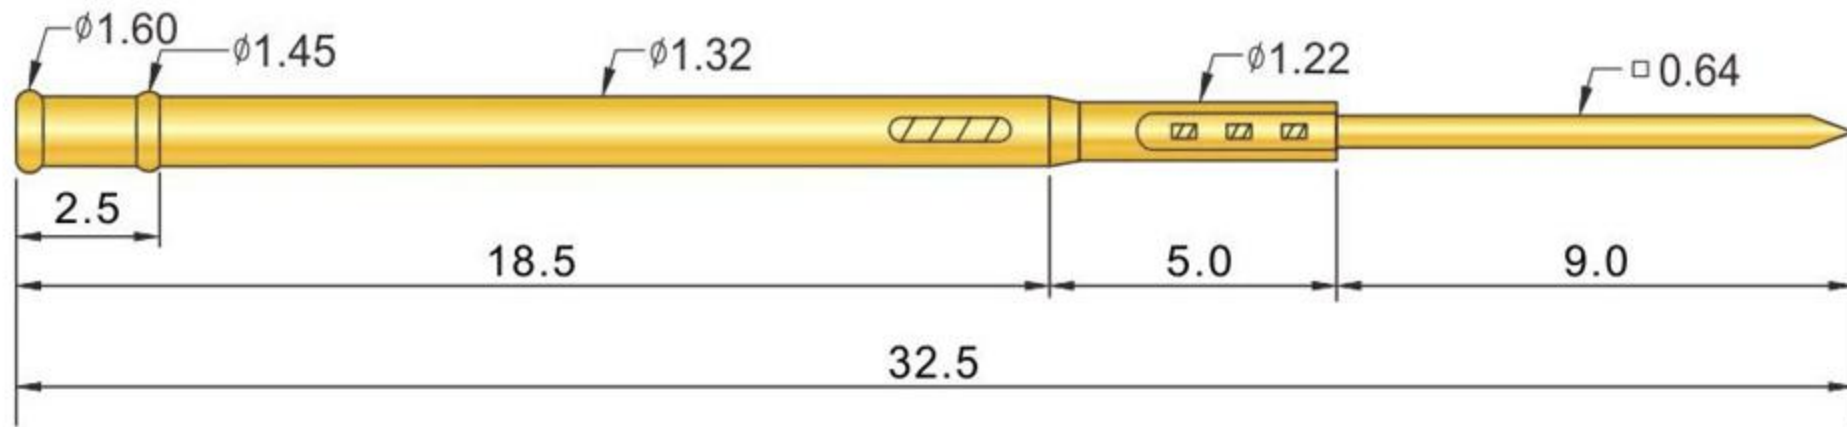

R11-2W



R11-3W



R11-1S



R11-2S



R11-3S



R11-1T



钻孔尺寸: 1.40mm

成品型号 (Product Type) :		材质 (Materials) :	
<p>R11-1W</p> <p>系列 规格 尾部特征</p> <p>订购举例:R11-1W</p>		针套(Receptacle)	Brass,gold-plated

PROBE