


P156

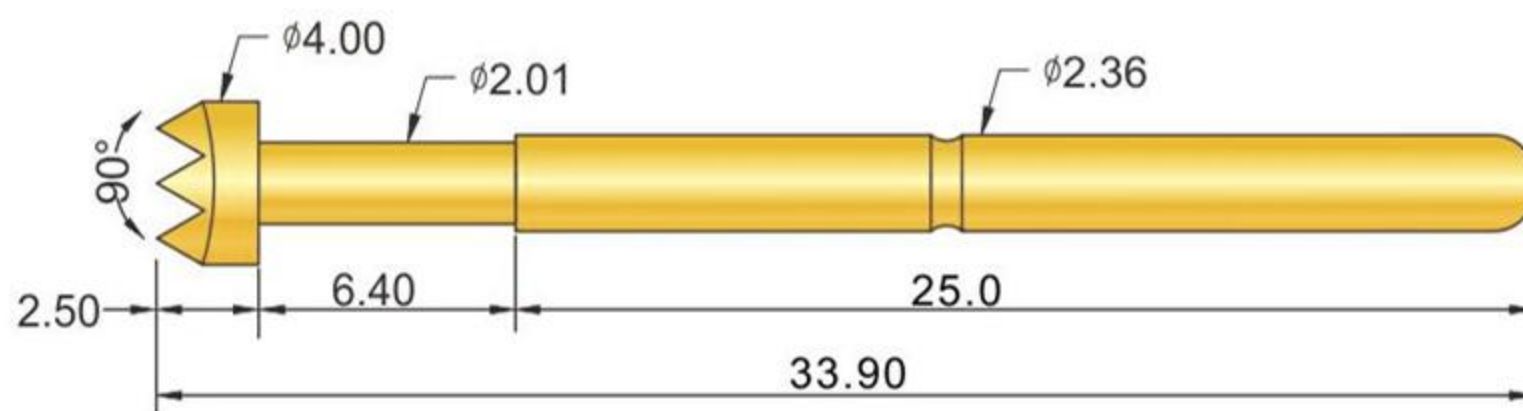


P156-A	P156-B
P156-D	P156-E2
P156-G2	P156-H
P156-J1	P156-Q1
P156-Q2	P156-T2

技术要求 (Technical Specifications) :	
额定电流 (Current Rating)	5A
接触电阻 (Contact Resistance)	50 milliohm
行程弹力 (Spring Force at Stroke)	(50g)(200g)250g(280g)(380g) <small>(括号内为定制品)</small>
材质 (Materials) :	
针管 (Barrel)	Brass, gold-plated
弹簧 (Spring)	Stainless Steel Wire
针杆 (Plunger)	国产料 (Domestic Materials)
	进口料 (Imported materials)
	Ph, Nickel-plated BeCu or SK4, Rh or gold-plated
成品型号 (Product Type) :	
<p style="text-align: center;"> P156-H-250g 订购举例: P156-H-250g </p> <p style="text-align: center; font-size: small;"> 系列 规格 头型 弹力 </p>	

R156

R156-4S

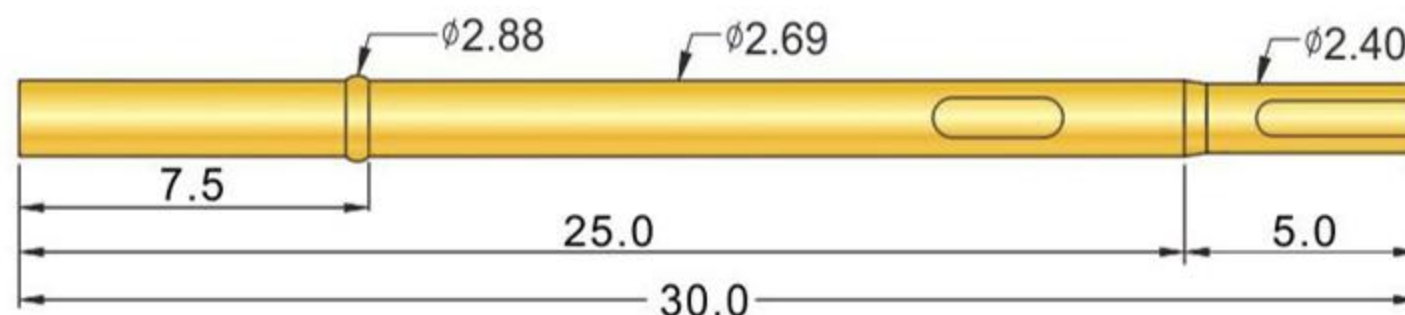

R156-1S



R156-3S



R156-2S



R156-4S



钻孔尺寸: 2.75mm

成品型号 (Product Type) :	材质 (Materials) :		
<p style="text-align: center;"> R156-4S 订购举例: R156-4S </p> <p style="text-align: center; font-size: small;"> 系列 规格 尾部特征 </p>	<table border="1"> <tr> <td>针套 (Receptacle)</td> <td>Brass, gold-plated</td> </tr> </table>	针套 (Receptacle)	Brass, gold-plated
针套 (Receptacle)	Brass, gold-plated		