



PL75

PL75-E2

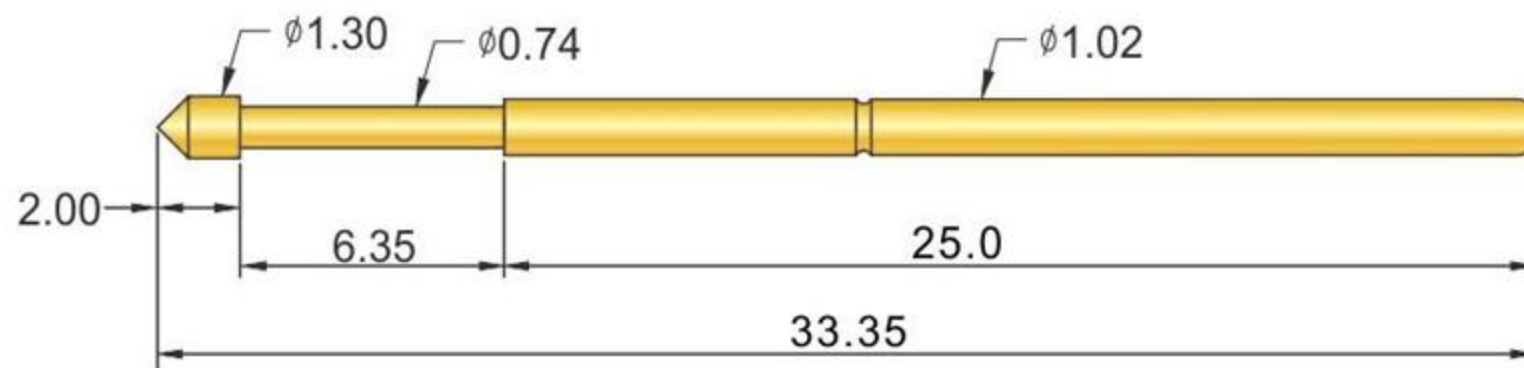

PL75-B1

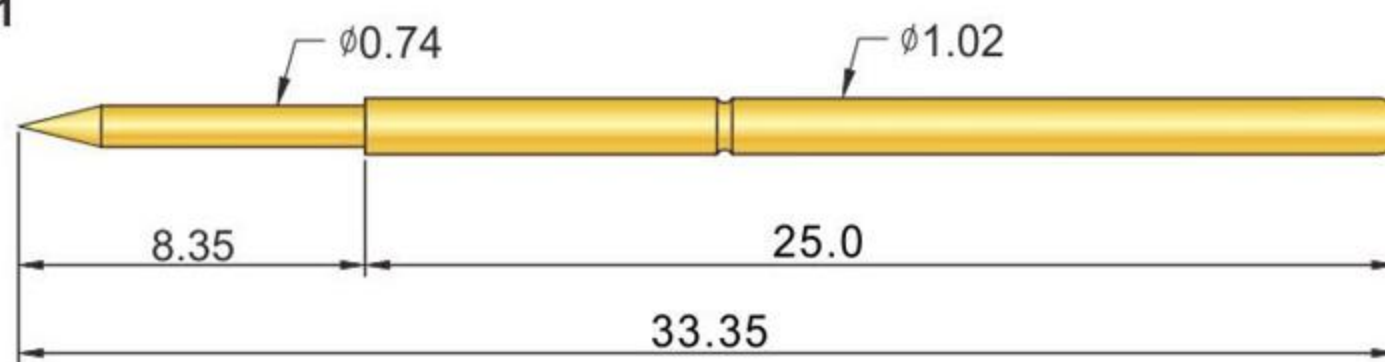

PL75-A2	PL75-B1	PL75-D2	PL75-E2	PL75-F1
PL75-G1	PL75-G2	PL75-H2	PL75-J1	PL75-LM2
PL75-Q1	PL75-Q2	PL75-T2	PL75-M3	

技术要求 (Technical Specifications) :	
额定电流 (Current Rating)	3A
接触电阻 (Contact Resistance)	50 milliohm
行程弹力 (Spring Force at Stroke)	(60g)(90g)120g(200g)(250g)


(括号内为定制品)

材质 (Materials) :	
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	Stainless Steel Wire
针杆 (Plunger)	国产料 (Domestic Materials)
	进口料 (Imported materials)

成品型号 (Product Type) :	
<p>PL75-E2-120g</p> <p>系列 规格 头型 头部直径 弹力</p>	<p>*1"表示针杆直上头型直径为0.74mm *2"表示标准头型直径为1.3mm</p> <p>订购举例:PL75-E2-120g</p>

RL75-1W

RL75

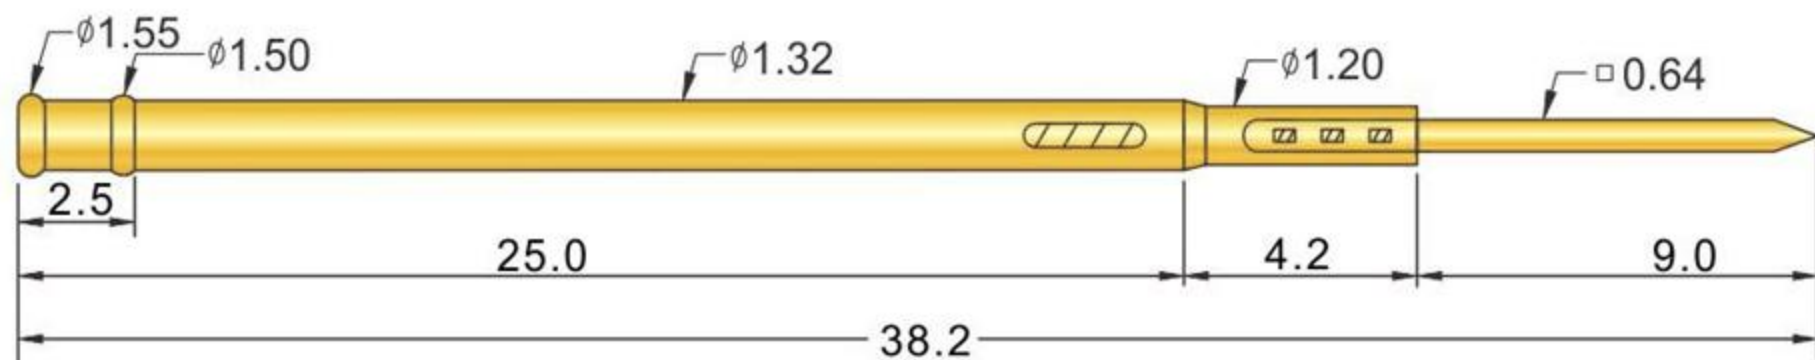

RL75-1W



RL75-1T



RL75-2W



RL75-2T



RL75-3W



RL75-3T



RL75-4W



RL75-4T



RL75-5W



RL75-5T



RL75-1S




RL75-4S



RL75-2S



RL75-5S

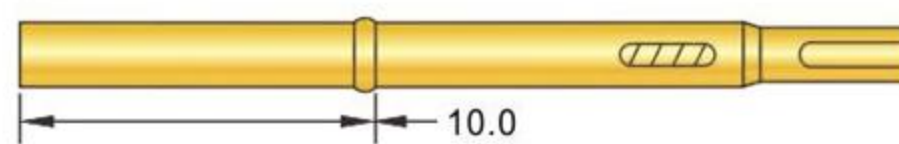

RL75-3S



钻孔尺寸: 1.40mm

成品型号 (Product Type) :		材质 (Materials) :	
<p>RL75-1W</p> <p>系列 规格 尾部特征</p>	订购举例: RL75-1W	针套(Receptacle)	Brass, gold-plated

PROBE