


PM75

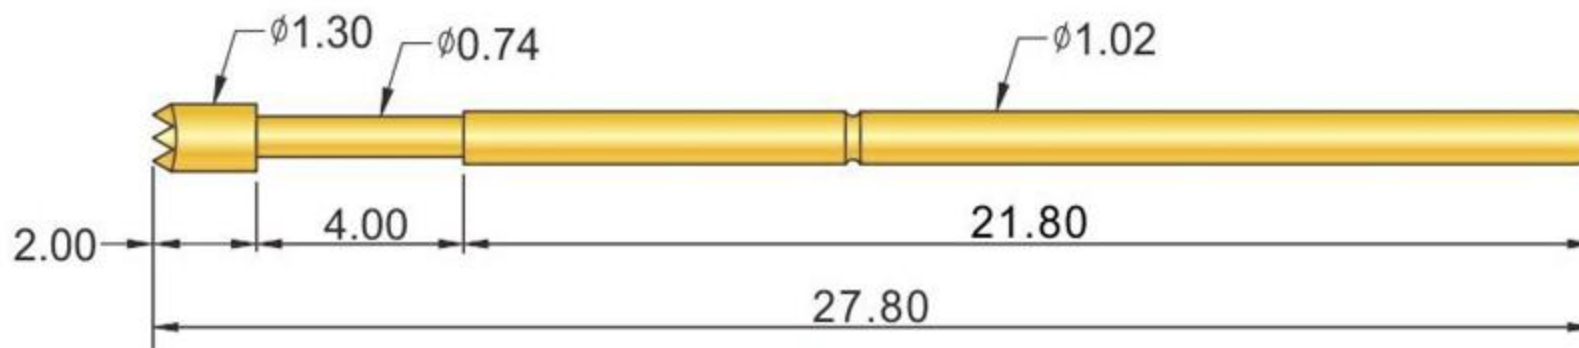


PM75-A2	PM75-B1	PM75-D2
PM75-E2	PM75-F1	PM75-G2
PM75-H2	PM75-H3	PM75-J1
PM75-LM2	PM75-LM3	PM75-Q1
PM75-Q2	PM75-T2	PM75-T3

技术要求 (Technical Specifications) :		
额定电流 (Current Rating)	3A	
接触电阻 (Contact Resistance)	50 milliohm	
行程弹力 (Spring Force at Stroke)	(60g)(100g)120g <small>(括号内为定制品)</small>	
材质 (Materials) :		
针管 (Barrel)	Ph,gold-plated	
弹簧 (Spring)	Stainless Steel Wire	
针杆 (Plunger)	国产料 (Domestic Materials)	Ph,Nickel-plated
	进口料 (Imported materials)	BeCu or SK4,Rh or gold-plated
成品型号 (Product Type) :		
<p>PM75-H2-120g</p> <p>系列 规格 头型 头部直径 弹力</p> <p>*1*表示针杆直上头型直径为0.74mm *2*表示标准头型直径为1.30mm *3*表示外径为1.50mm</p> <p>订购举例:PM75-H2-120g</p>		

RM75

RM75-1W

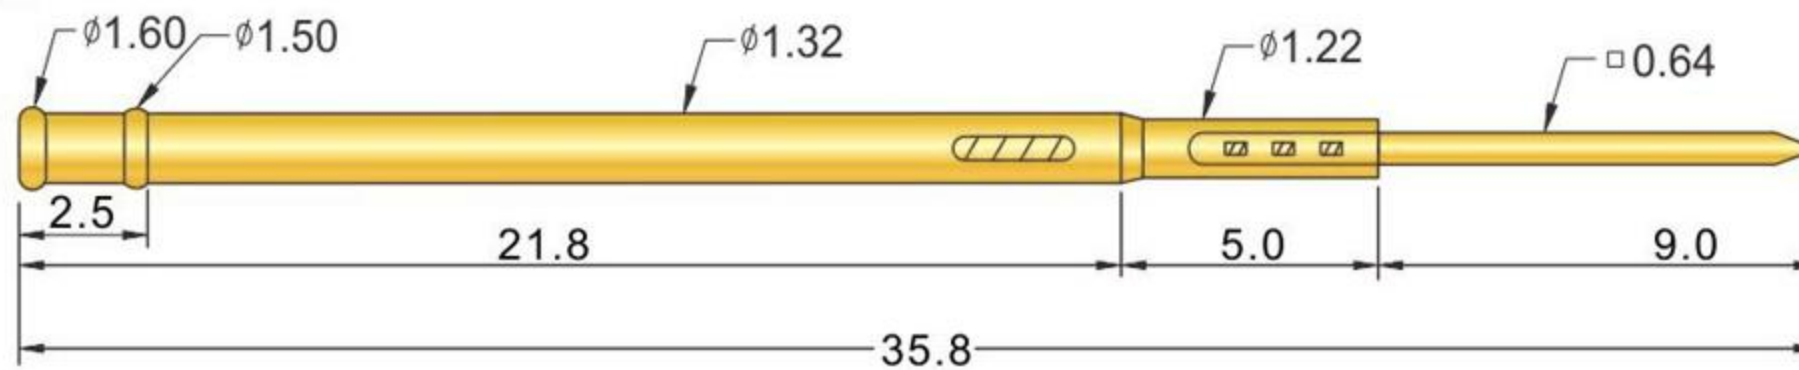

RM75-1W



RM75-2W



RM75-3W



RM75-1S



RM75-2S



RM75-3S



钻孔尺寸: 1.40mm

成品型号 (Product Type) :	材质 (Materials) :
<p>RM75-1W</p> <p>系列 规格 尾部特征</p> <p>订购举例:RM75-1W</p>	<p>针套(Receptacle)</p> <p>Brass,gold-plated</p>