



S1353

S1353-B

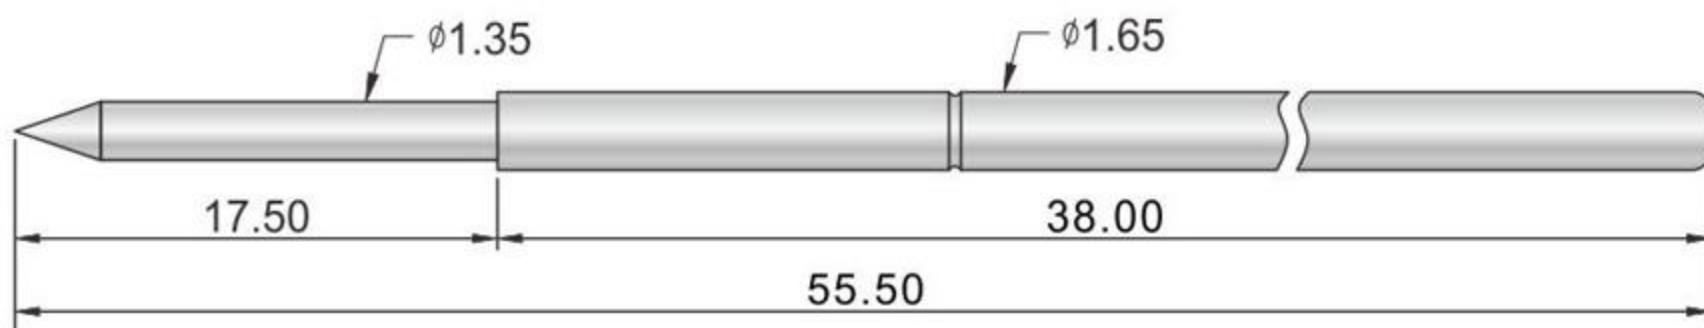


S1353-Q

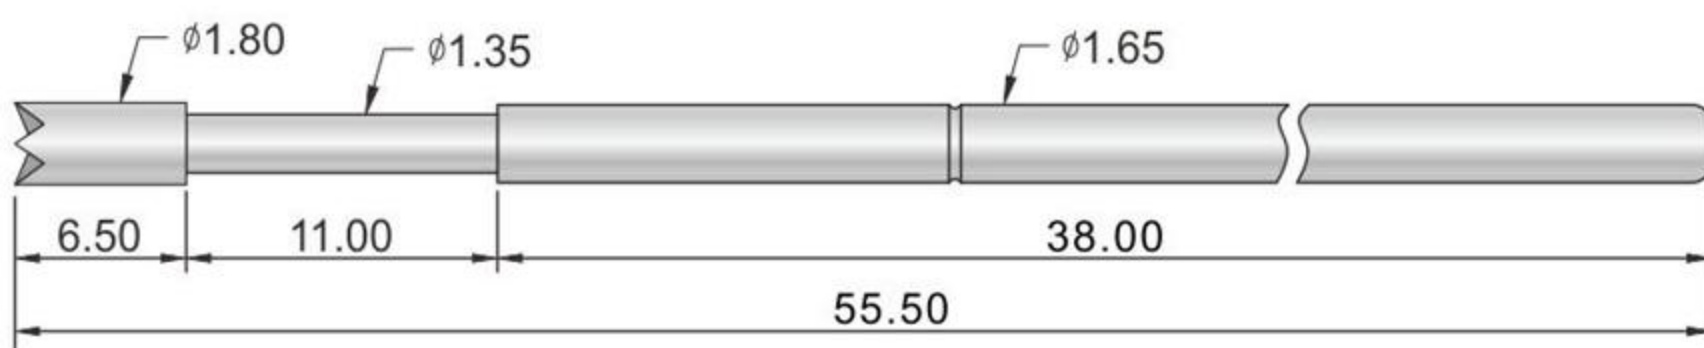

技术要求 (Technical Specifications) :	
额定电流 (Current Rating)	3A
接触电阻 (Contact Resistance)	50 milliohm
行程弹力 (Spring Force at Stroke)	(180g)340g <small>(括号内为定制品)</small>
材质 (Materials) :	
针杆 (Plunger)	Ni-Ag/Ph, Nickel/gold-plated
针管 (Barrel)	Ni-Ag/Ph, Nickel
弹簧 (Spring)	Music Wire
成品型号 (Product Type) :	
<p style="text-align: center;"> S1353-B-340g 订购举例: S1353-B-340g </p> <p style="font-size: small; text-align: center;"> 系列 规格 头型 弹力 </p>	

S1353-B	
S1353-H	
S1353-Q	
S1353-M3	

RS1353-W

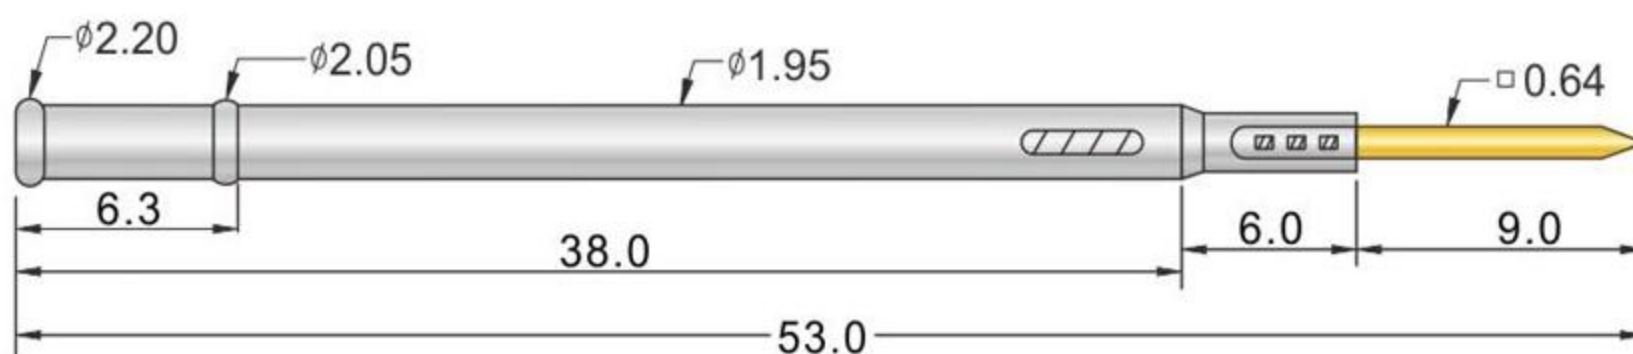

钻孔尺寸: 2.00mm

材质 (Materials) :	
针套(Receptacle)	Ni-Ag/Ph, Nickel/gold-plated

成品型号 (Product Type) :	
<p style="text-align: center;"> RS1353-W 订购举例: RS1353-W </p> <p style="font-size: small; text-align: center;"> 系列 规格 尾部特征 </p>	

PROBE