


SP100

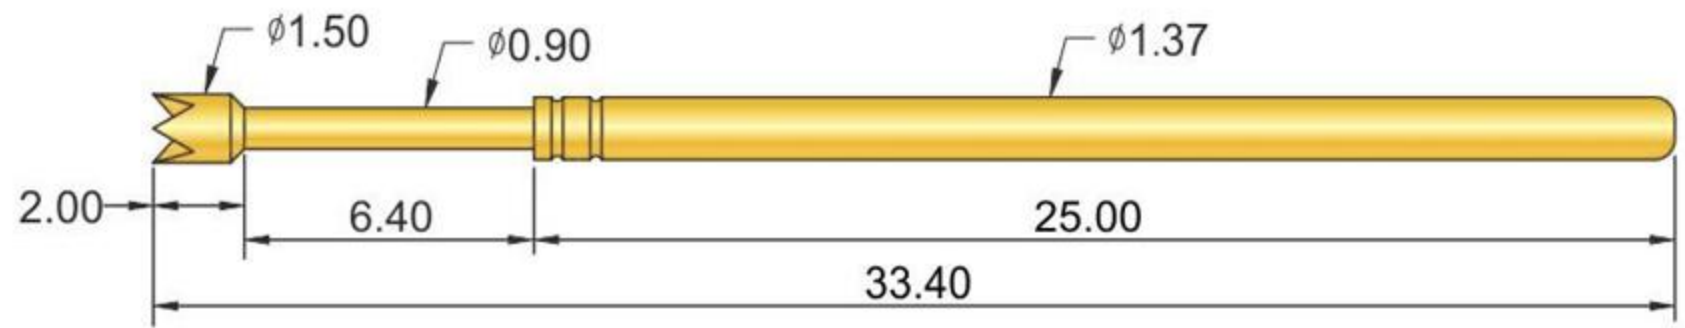

006-N225	201-N090	302-N150	303-N150	204-N130
204-N150	305-N090	306-N130	306-N150	306-N200
306-N300	307-N090	307-N150	209-N060	313-N090
214-N050	214-N106	214-N130 (N150)	217-N170	224-N130 (N150)
225-N130 (N150)	231-N090	233-N106	238-N090	355-N064
277-N090	288-N150	289-N050	291-N090	291-N130
293-N160	297-N090	298-N090		

技术要求 (Technical Specifications) :

额定电流 (Current Rating)	5A
接触电阻 (Contact Resistance)	30 milliohm max
行程弹力 (Spring Force at Stroke)	2N(200gf),3N(300gf)

材质 (Materials) :

针杆 (Plunger)	SK4/BeCu,gold-plated
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	SWP,gold-plated


成品型号 (Product Type) :

SP100-006-N225-2N
 系列 规格 头型 尺寸特征 弹力


订购举例:SP100-006-N225-2N

R100


R100-4S

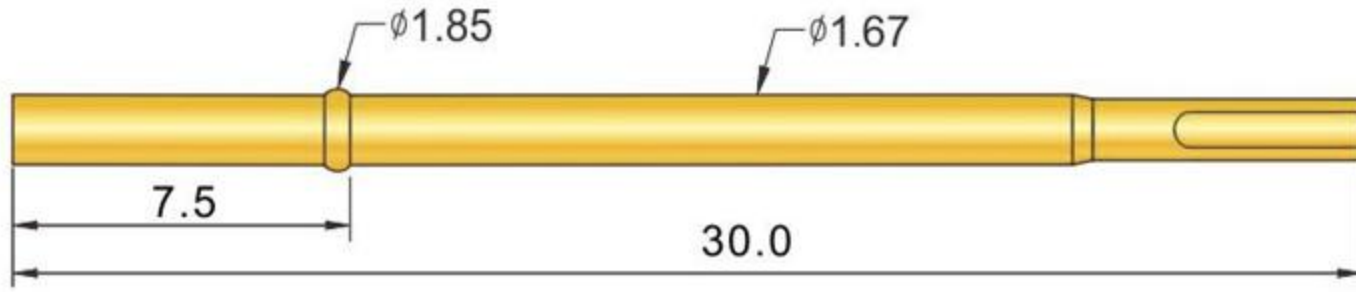


R100-5S

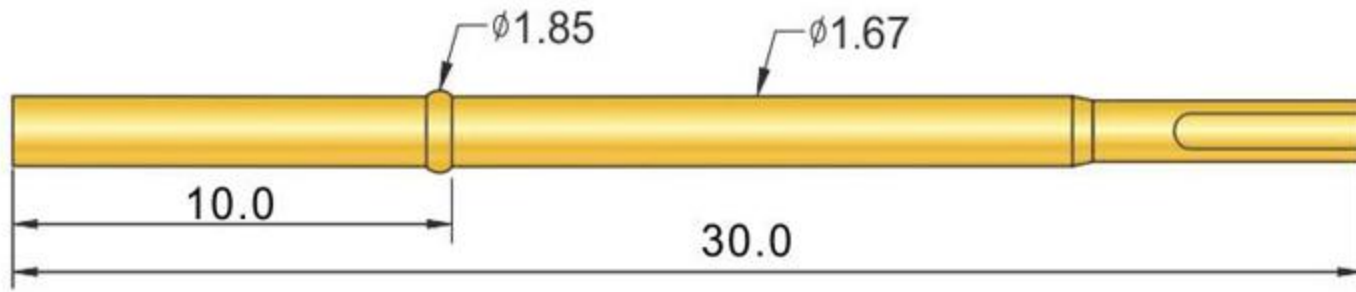


R100-4W

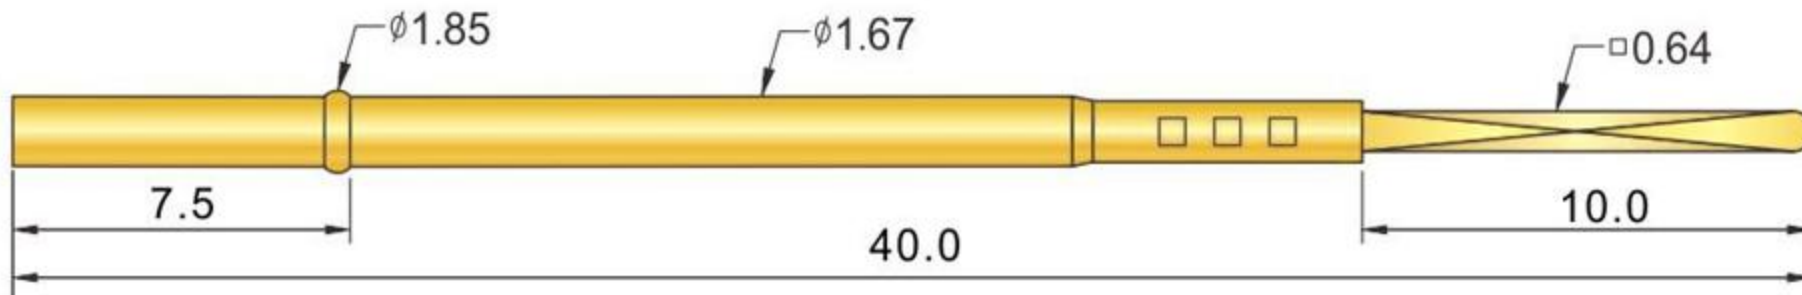


R100-5W

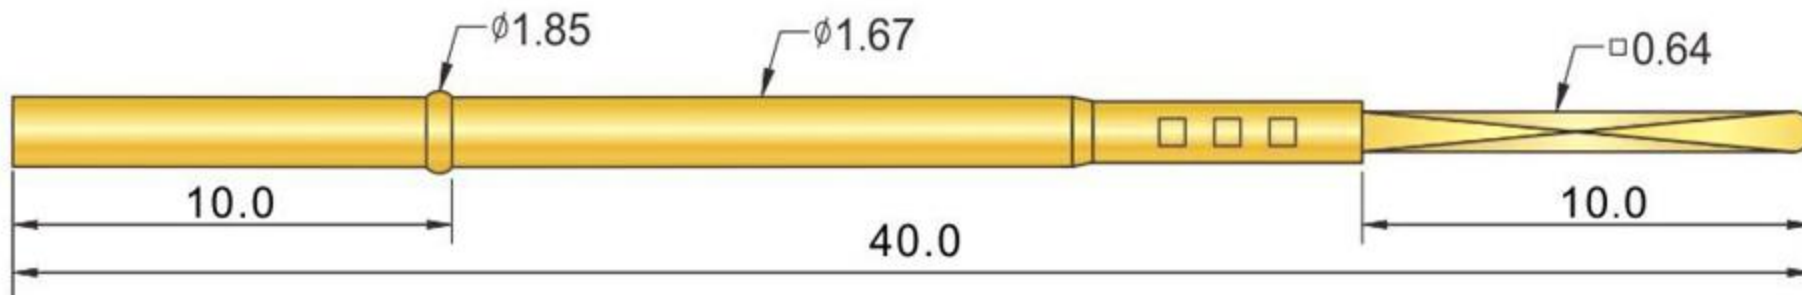

R100-4T

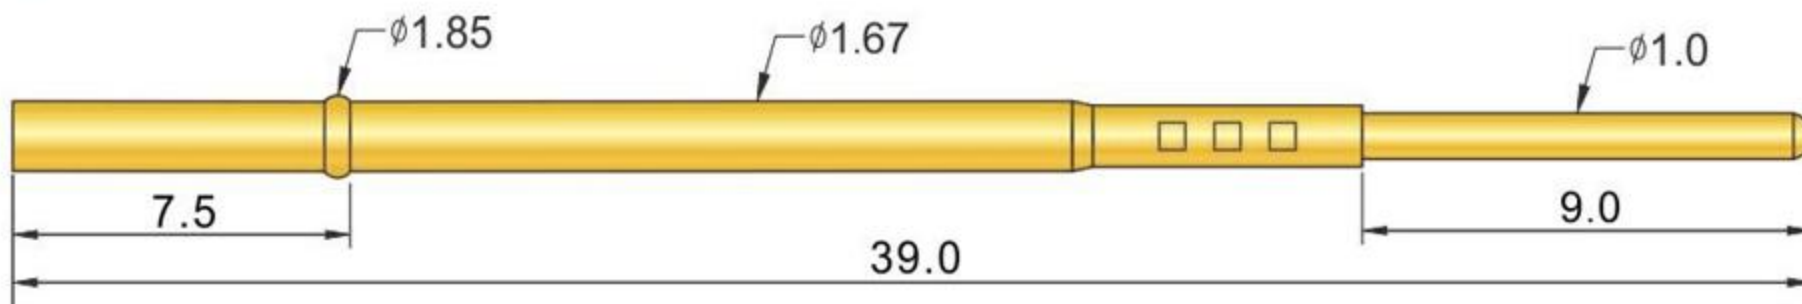

R100-5T

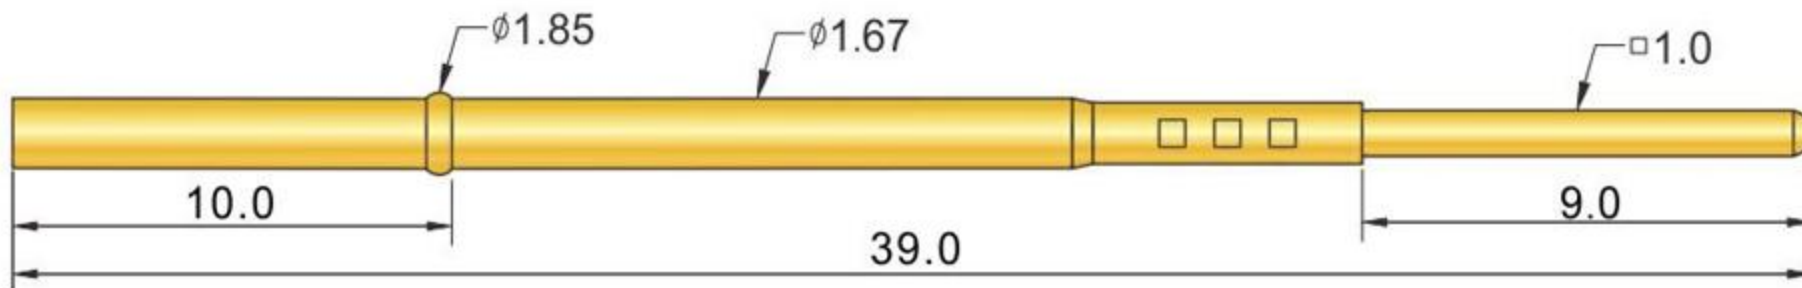

钻孔尺寸: 1.70mm

成品型号 (Product Type) :		材质 (Materials) :	
<p>R100-4S</p> <p>系列 规格 尾部特征 订购举例: R100-4S</p>		针套(Receptacle)	Ph,gold-plated

PROBE